

HIGOLD® Shearer 3.0 Max Pull Out Multi Purpose Basket

Installation manual



Shearer 3.0 Max



HIGOLD®
Leading design Perfect experience

Please note before installation


1. The minimum depth of the Shearer 3.0 Max Pull Out Multi Purpose Basket is 460mm, and the minimum installation height is 300mm. The width should be selected according to the cabinet size. Please pay attention to the cabinet size when installing.
2. The accessories quantity of each cabinet are slightly different, and the specific number of accessories is according to the installation manual. In this part is about the installation of cabinet with 900mm width.

STEP - 01 -


Accessory list

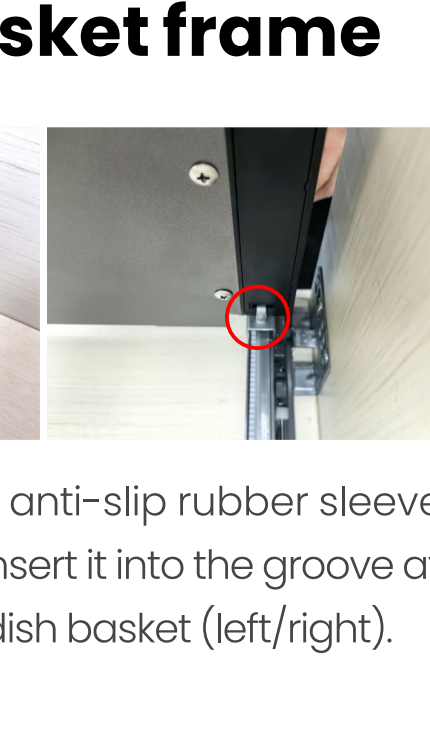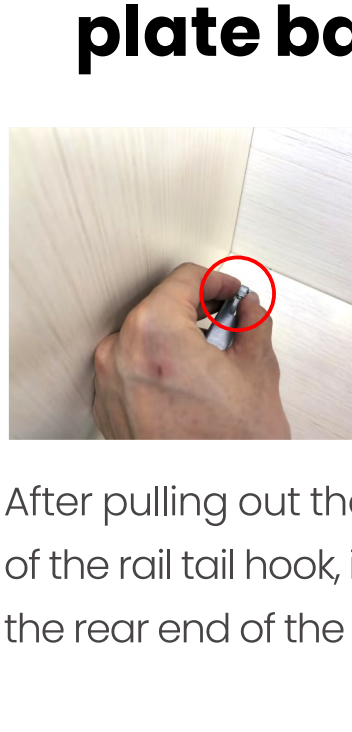


A basket frame and a set of slide

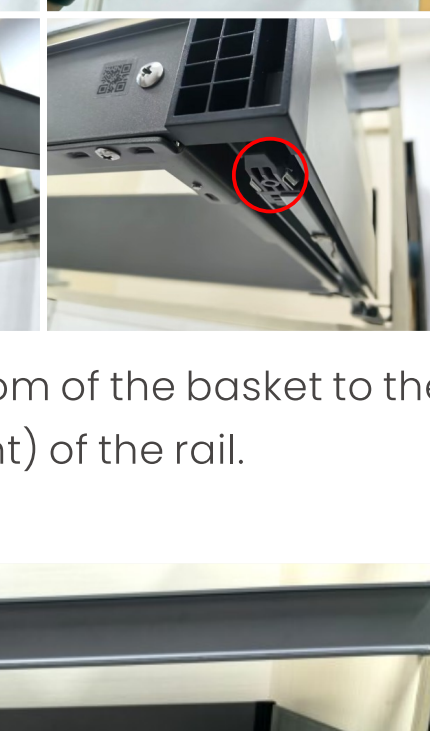


Large bowl and plate rack*1PCS and large bowl rack*1PCS

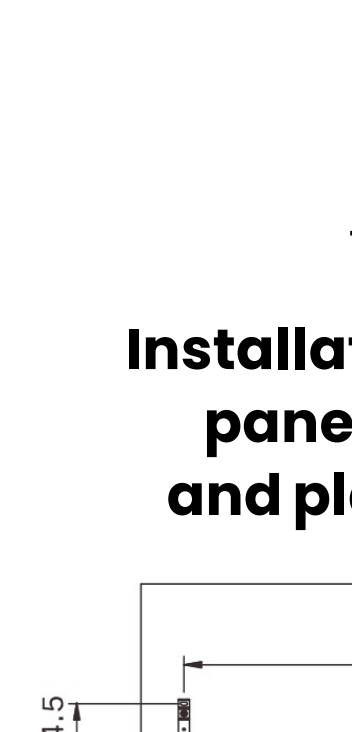

Two layer-shelf*1SET and door panel decorative covers*2PCS

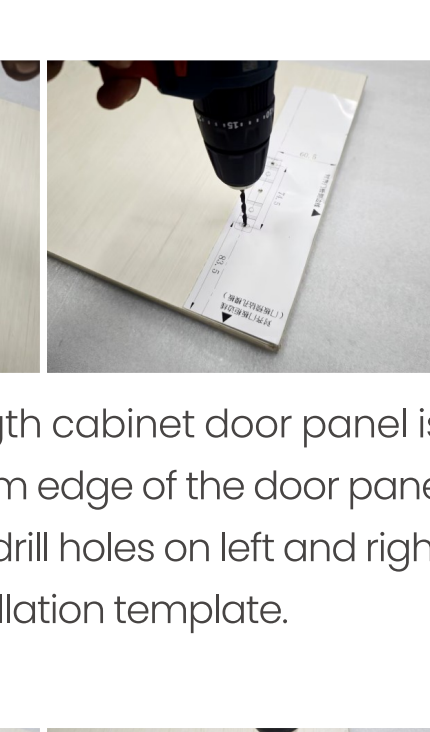



Two door panel fasteners (two M4*16 screws and four M5*10 screws have been pre-installed), four M5*10 top screws and eighteen ST4*16 self-tapping screws.

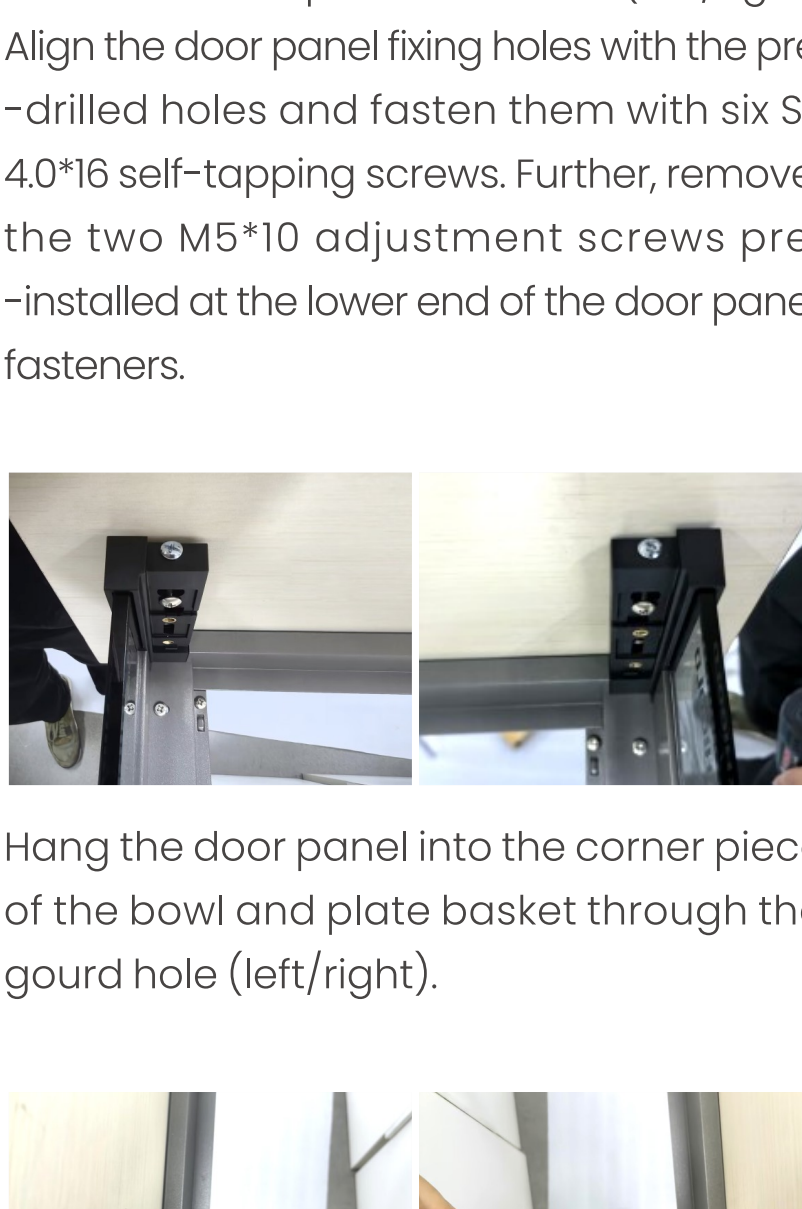

A install template

STEP - 02 -

Install the slide

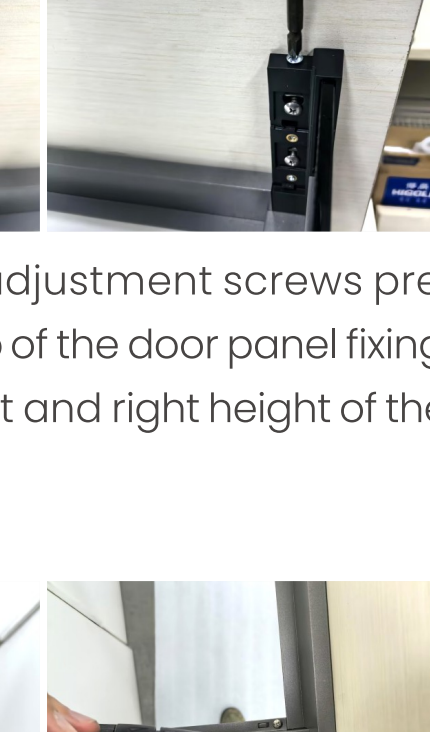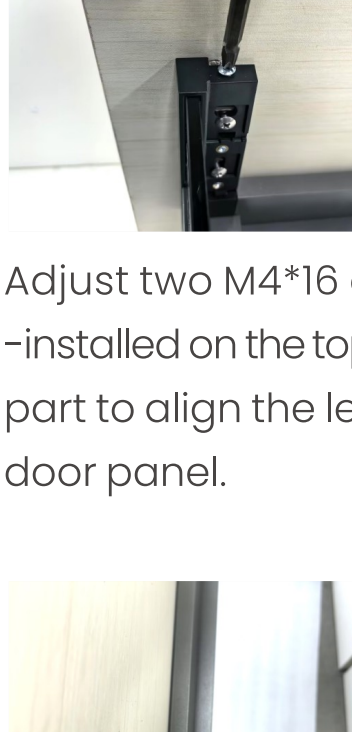


Use the bottom edge of the cabinet and the door edge as reference, and use the installation template to pre-drill holes (left/right).

Note: When installing the upper door panel without a pull handle, use the top of the pull handle as reference.




Install the slides (left/right), lock the fixed hole of the slide using sixteen ST4.0 self-tapping screws to against the pre-drilled hole.

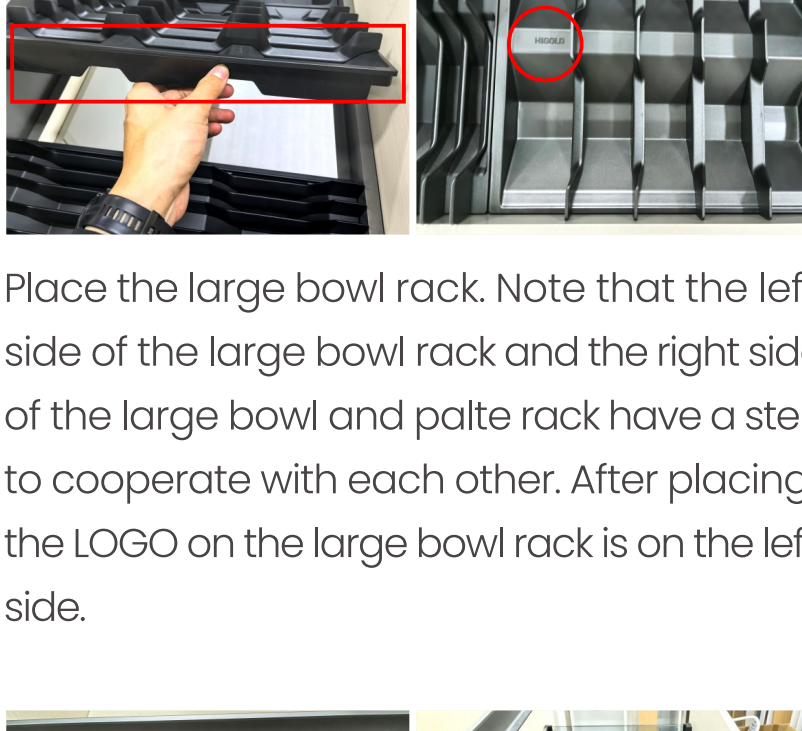

The slide rail is installed.

STEP - 03 -

Install the bowl and plate basket frame

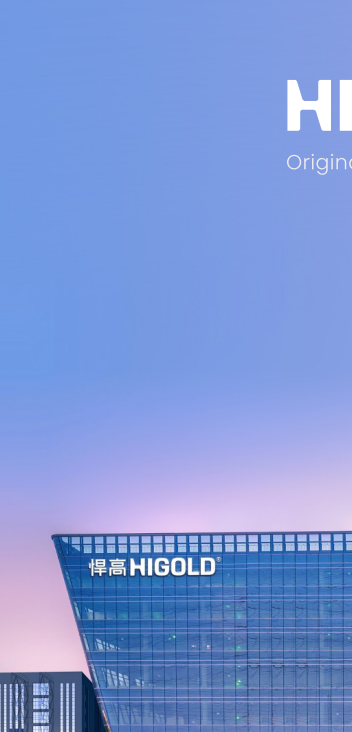

After pulling out the anti-slip rubber sleeve of the rail tail hook, insert it into the groove at the rear end of the dish basket (left/right).

Then clip the bottom of the basket to the front end (left/right) of the rail.

The frame of the bowl and plate basket is installed.

STEP - 04 -

Installation for door panels of bowl and plate basket

Standard length door panels can be pre-drilled directly using the installation template, while non-standard length door panels need to be pre-drilled after precise measurement of the drilling distance L between two door panel fasteners.

While standard length cabinet door panel is used, take the bottom edge of the door panel as a reference, pre-drill holes on left and right sides using the installation template.

Install the door panel fasteners (left/right). Align the door panel fixing holes with the pre-drilled holes and fasten them with six ST 4.0*16 self-tapping screws. Further, remove the two M5*10 adjustment screws pre-installed at the lower end of the door panel fasteners.

Hang the door panel into the corner piece of the bowl and plate basket through the gourd hole (left/right).

Retighten two M5*10 adjustment screws into the door panel fasteners (left/right).

Secure the four top screws into the corner piece of the bowl and plate basket and adjust the tilt (left/right) of the door panel.

Adjust two M4*16 adjustment screws pre-installed on the top of the door panel fixing part to align the left and right height of the door panel.

Adjust the door panel to fit closely and align level with the cabinet, then tighten four M5*10 screws to secure the door panel (left/right).

Install the left and right door panel cover, push in from both sides to the slot and fix it.

The door panel is installed.

STEP - 05 -

Install accessories

Place a large bowl and plate rack on the left side and two-layer shelves on the right side of basket.

Place the large bowl rack. Note that the left side of the large bowl rack and the right side of the large bowl and palte rack have a step to cooperate with each other. After placing, the LOGO on the large bowl rack is on the left side.

The Shearer 3.0 Max Pull Out Multi Purpose Basket is installed.

Note: Pay attention to the size of multi-layer installation, so as not to avoid interference between basket body and pull-out after assembly. When installing the upper layer, press the top edge of the lower door panel as reference for the upper layer installation. When installing the upper layer without pull handle door panel, according to the top of the pull handle as reference.

HIGOLD®

Original Design & Quality

